




Foam Pig type PU-HD-AC

The abrasive coated foam pig is provided with helical bands of heavily impregnated carborundum. These bands generate a severe scraping effect. The abrasive coated foam pig is most appropriate for removal of rust and all sorts of scale and debris.

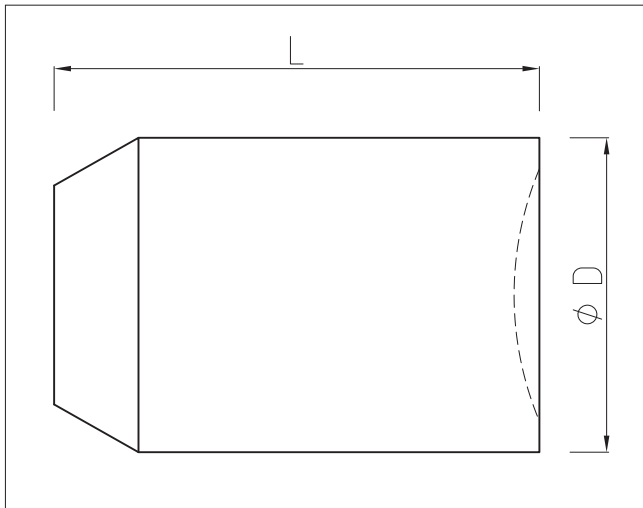

Standard dimensions in mm, Standard deviation +/- 2%.
Special dimensions and executions available upon request.
Density: 110 kg/m³ (9 lbs/cft)
Maximum diameter reduction: 10%

Size	D x L	Weight (kg)
2"	64x155	0.14
2.1/2"	79x155	0.19
3"	89x155	0.24
4"	114x195	0.40
5"	143x220	0.54
6"	172x266	1.00
7"	181x280	1.16
8"	219x330	1.90
10"	274x415	3.50
12"	325x510	5.90
14"	350x530	7.30
16"	414x595	12.00
18"	459x760	14.80
20"	509x760	20.50
22"	559x810	26.00
24"	609x880	33.00
26"	669x990	44.00
28"	714x945	49.00
30"	764x1130	67.00
32"	814x1170	78.00
34"	859x1340	98.00
36"	914x1370	112.00
38"	964x1370	123.00
40"	1014x1470	148.00
42"	1064x1580	173.00
44"	1124x1640	200.00
46"	1164x1720	224.00
48"	1224x1760	253.00
56"	1424x2100	404.00
60"	1525x2250	564.00
64"	1624x2600	645.00
76"	1945x2820	1100.00
80"	2035x3000	1550.00